




DRAGLINE EQUIPMENT

The dragline irrigation system consists of a mainline with fixed or portable laterals. A flexible hose (20 or 25mm diameter) connects a stand, mounted with a sprinkler, to the lateral. Portable laterals are moved once each sprinkler has completed its position. One hose and sprinkler can usually do 3, 5 or 7 positions from a lateral.

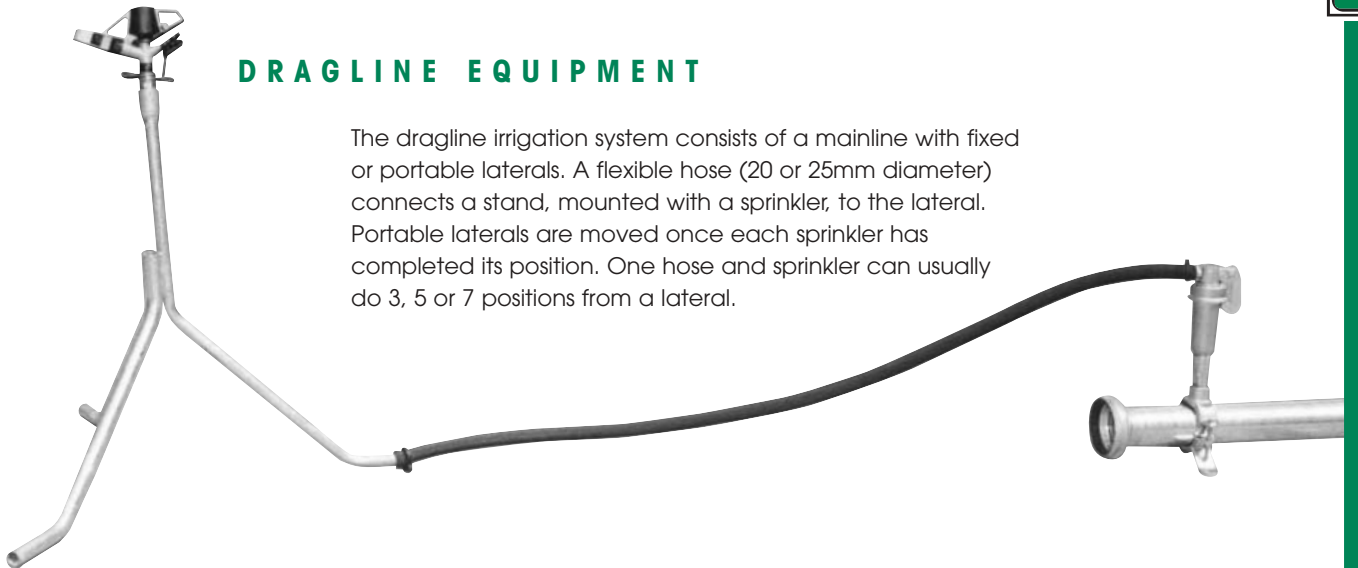


Dragline stands and hoses

Code & Description	Size (mm)	Mass (kg)	 Sprinkler not included
DS Fixed tripod, 20mm galvanised steel pipe, with 20mm socket on top	20 x 300	0.80	
	20 x 600	1.30	
	20 x 1000	1.80	
	20 x 1200	1.90	
Cane collapsible type	20 x 1800	7.00	
	20 x 3000	10.00	

Code & Description	Diameter (mm)	Year life	
IF Irriflex dragline hose	20	5 - Blue stripe	
	20	10 - Orange stripe	
	25	10	

Code & Description	Size (mm)	
HC Hose clamp	20	

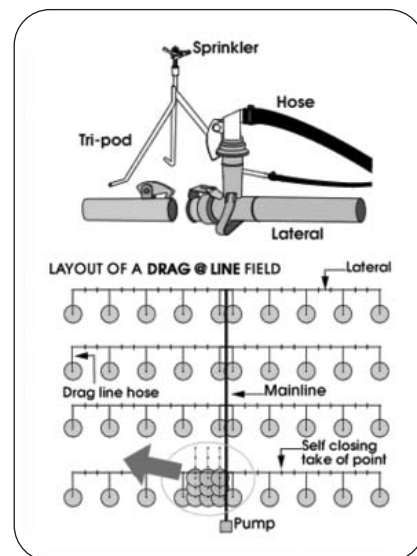

Valves and hose connectors

Code & Description	Size (mm)	Mass (kg)	 NOW IN PLASTIC
IR34 & IR34P Aluminium (IR34) and plastic (IR34P) IRRIMATIC self-closing take-off valve (25mm female)	IR34	0.23	
	IR 34 cover*	0.48	
	IR34 long*	0.29	
	IR34P	0.17	
	IR34P & spring	0.17	

Code & Description	Size (mm)	Mass (kg)	
IR25 Irrivalve Fits into the IRRISLEEVE, 25mm threaded male end threaded outlet	25 x 230	0.70	
	25 x 330	0.80	
	25 x 500	1.40	
	25 x 750	1.80	
	25 x 1000	2.50	

Code & Description	Size (mm)	Mass (kg)	 NOW IN PLASTIC
SNS & SNSP Hose connector aluminium (SNS) or plastic (SNSP), fits into IR34 & IR34P	SNS20	0.17	
	SNS25	0.20	
	SNS20P	0.10	

Code & Description	Size (mm)	Mass (kg)	
30RN02 Swaged elbow for dragline, use to convert BN90 saddles to dragline	20x200	0.41	
	25x200	0.41	

Code & Description	Size (mm)	Mass (kg)	
Irrisleeve Opens the irrivalve, 25mm threaded female outlet	25	0.50	

Code & Description	Size (mm)	Mass (kg)	
BN Regular and reducing barrel nipple	20	0.16	
	20	0.17	
	25 x 20	0.18	

* Not normally in stock





IRRIMATIC spares - IR34 steel & aluminium SNS20, IRRISLEEVE, IRRIVALVE

